


Clarke®



GARAGE WORKLIGHT MODEL NO: GWL700R

PART NO: 4003541



USER INSTRUCTIONS



ORIGINAL INSTRUCTIONS

GC07/23

INTRODUCTION

Thank you for purchasing this CLARKE worklight. Before attempting to use this worklight, please read this manual thoroughly and follow the instructions carefully.

CONTENTS

- Lamp unit
- 100-240V Charger with USB port
- Micro USB to USB charging cable

TECHNICAL SPECIFICATIONS

Model	GWL700R	
Operating voltages	5V(light), 230V(charger)	
LED Wattage consumption	10W total	
LED replaceable	No	
Rechargeable Lithium battery pack	2 x 3.7V / 5200mAh	
Charger output	5V DC, 2A	
Lighting source	2 x lamps	
Light output (luminous flux)	Single light 350-/ two lights 700 Lumen	
Colour temperature (rendering)	6000-6800K	
Ingress Protection (IP rating)	IP20	
Battery charging time	5-6 hours	
Approximate Run Time	Power @ 50%	7 Hours
	Power @ 100%	5 Hours
Rated lamp lifetime	30,000 hours	
Efficiency	70 Lm/W	
Operating temperatures	0 to +45°C	
Dimensions	780 x 70 x 70mm	
Weight	1.4Kg	

SAFETY INSTRUCTIONS

1. **ALWAYS** check for damage before using the worklight. Inspect the power cable and plug for damage. Any damage should be properly repaired or the part replaced. Consult your local CLARKE dealer.
2. **ALWAYS** ensure that the voltage marked on the charger matches the power supply to be used.
3. **NEVER** use this lamp in a bathroom or in the vicinity of a swimming pool.
4. **NEVER** cover the lamp.
5. **NEVER** pull the cable to remove the charger plug from the power supply.
6. **DO NOT** look directly into the worklight when it is switched on.
7. Keep the worklight out of the reach of children.
8. Charge the worklight in a dry indoor location. **DO NOT** immerse in water or any other liquid.
9. **ALWAYS** fully charge before first use.
10. **DO NOT** turn on the light when charging.
11. **DO NOT** leave the worklight on charge for more than 24 hours.
12. **DO NOT** disassemble the worklight as there are no user changeable parts.
13. This worklight utilises a rechargeable Lithium-ion battery that can rupture, ignite and cause serious injury if being used improperly.
14. **DO NOT** put batteries and the worklight in the fire or high temperature.
15. **DO NOT** puncture or damage the batteries.
16. **DO NOT** immerse or expose the worklight to water.
17. **DO NOT** dispose of the worklight in a fire or water.

THE FOLLOWING WARNING SYMBOLS ARE FOUND ON THE PRODUCT



Indoor use



Harmful to aquatic life



Pacemaker hazard (due to magnet)



Not suitable for use by children

ENVIRONMENTAL RECYCLING POLICY



Through purchase of this worklight, the customer is taking on the obligation to deal with the WEEE in accordance with the WEEE regulations in relation to the treatment, recycling & recovery and environmentally sound disposal of the WEEE.

In effect, this means that this worklight must not be disposed of with general household waste. It must be disposed of according to the laws governing Waste Electrical and Electronic Equipment (WEEE) at a recognised disposal facility.

The light source contained in this worklight has a life expectancy of approximately 30000 hours after which the worklight should be disposed of in an environmentally responsible way.

The Lithium Ion battery falls under the Waste Batteries and Accumulators Regulations 2009 and should be disposed of in a controlled manner.

GUARANTEE

This worklight is guaranteed against faulty manufacture for a period of 12 months from the date of purchase. Please keep your receipt which will be required as proof of purchase.

This guarantee is invalid if the worklight is found to have been abused or tampered with in any way, or not used for its intended purpose.


Faulty goods should be returned to their place of purchase, no worklight can be returned to us without prior permission.

This guarantee does not effect your statutory rights.

CHARGING THE WORKLIGHT

IMPORTANT: Charge the worklight after each use or when the battery indicator light shows low.

1. Before charging, make sure the work light is turned off.
2. Connect the micro USB end of the charging cable to the micro USB port on the worklight the USB port on the wall charger.
3. Plug the AC charger into a live AC outlet.
 - The green LEDs will illuminate to indicate battery status. Charging will typically take 5-6 hours. When the battery is fully charged all four LEDs will be lit. When fully charged, unplug the charger from the AC outlet and then from the work light.
4. Charge the battery every 3 months if the worklight is not in regular use to ensure the longevity of the battery unit. Failure to do this will reduce the battery's capacity and may void the warranty.

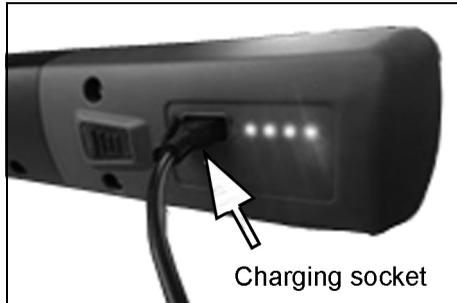

OPERATION

Charge the internal battery before use.

- Press the power button to ensure there is enough power before use. If low battery power or no power, continue to charge the worklight.
- 1x press – turns on one light
- 2x presses– turns on two lights
- 3x presses – turns all the light off

The position of each individual light may be rotated for more precise positioning. Tilt the mainbody to the desired position.

As the batteries become drained the status LEDs will change from green to red.

When mounting the worklight to a steel surface ensure both the magnets are in contact with the steel surface. i

DECLARATIONS OF CONFORMITY



Fitzwilliam Hall, Fitzwilliam Place, Dublin 2

DECLARATION OF CONFORMITY

This is an important document and should be retained.

We hereby declare that this product(s) complies with the following legislation:

- 2006/66/EC *Battery Directive*
- 2014/30/EU *Electromagnetic Compatibility Directive*
- 2014/35/EU *Low Voltage Directive*
- 2011/65/EU *Restriction of Hazardous Substances (RoHS) Directive*

The following standards have been applied to the product(s):

- IEC 62321-1:2013, IEC 62321-2:2013, IEC 62321-3-1:2013, IEC 62321-4:2013+A1:2017, IEC 62321-5:2013
- IEC 62321-6:2015, IEC 62321-7:2015, IEC 62321-7-2:2017, IEC 62321-8:2017, ISO 17075:2017, EN 55014-2:2015, EN 55014-1:2017+A11:2020, BS EN 60335-1:2012+A13:2017, BS EN 60335-2-29:2004+A2:2016, BS EN 62233:2008, EN IEC 55015:2019+A11:2020, EN IEC 61000-3-2:2018, EN 61000-3-3:2013+A1:2019, EN 61547:2009, EN 61558-1:2019, EN 61558-2-16:2009+A1:2013.

The technical documentation required to demonstrate that the product(s) meet(s) the requirement(s) of the aforementioned legislation has been compiled and is available for inspection by the relevant enforcement authorities.

The CE mark was first applied in: 2023

Product Description: LED Worklight
 Model Number(s): GWL700R
 Serial/Batch Number: Refer to product/packaging label
 Date of Issue: 10/07/2023

Signed:

J.A. Clarke
 Director

GWL700R, CE, Clarke, DOC 071023

Page 1 of 1



Hermall Street, Epping, Essex, CM16 4LG

DECLARATION OF CONFORMITY

This is an important document and should be retained.

We hereby declare that this product(s) complies with the following legislation:

- The Batteries and Accumulators (Placing on the Market) Regulations 2008*
- The Electromagnetic Compatibility Regulations 2016*
- The Electrical Equipment (Safety) Regulations 2016*
- The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012*

The following standards have been applied to the product(s):

- IEC 62321-1:2013, IEC 62321-2:2013, IEC 62321-3-1:2013, IEC 62321-4:2013+A1:2017, IEC 62321-5:2013
- IEC 62321-6:2015, IEC 62321-7:2015, IEC 62321-7-2:2017, IEC 62321-8:2017, ISO 17075:2017, EN 55014-2:2015, EN 55014-1:2017+A11:2020, BS EN 60335-1:2012+A13:2017, BS EN 60335-2-29:2004+A2:2016, BS EN 62233:2008, BS EN IEC 55015:2019+A11:2020, BS EN IEC 61000-3-2:2018, BS EN 61000-3-3:2013+A1:2019, BS EN 61547:2009

The technical documentation required to demonstrate that the product(s) meet(s) the requirement(s) of the aforementioned legislation has been compiled and is available for inspection by the relevant enforcement authorities.

The UKCA mark was first applied in: 2023

Product Description: LED Worklight
 Model Number(s): GWL700R
 Serial/Batch Number: Refer to product/packaging label
 Date of Issue: 10/07/2023

Signed:

J.A. Clarke
 Director

GWL700R, UKCA, Clarke, DOC 071023

Page 1 of 1

A SELECTION FROM THE VAST RANGE OF

Clarke®

QUALITY PRODUCTS



AIR COMPRESSORS

From DIY to industrial, Plus air tools, spray guns and accessories.

GENERATORS

Prime duty or emergency standby for business, home and leisure.

POWER WASHERS

Hot and cold, electric and engine driven - we have what you need

WELDERS

Mig, Arc, Tig and Spot.
From DIY to auto/industrial.

METALWORKING

Drills, grinders and saws for DIY and professional use.

WOODWORKING

Saws, sanders, lathes, mortisers and dust extraction.

HYDRAULICS

Cranes, body repair kits, transmission jacks for all types of workshop use.

WATER PUMPS

Submersible, electric and engine driven for DIY, agriculture and industry.

POWER TOOLS

Angle grinders, cordless drill sets, saws and sanders.

STARTERS/CHARGERS

All sizes for car and commercial use.



PARTS & SERVICE: 0208 988 7400

Parts Enquiries
Parts@clarkeinternational.com

Servicing & Technical Enquiries
Service@clarkeinternational.com

SALES: UK 01992 565333 or Export 00 44 (0)1992 565335

Clarke INTERNATIONAL Hemnall Street, Epping, Essex CM16 4LG
www.clarkeinternational.com