

Clarke®

CONTRACTOR®



GAS BOTTLE TOP HEATER

MODEL NO: GSH15

PART NO: 6920040

OPERATION & MAINTENANCE INSTRUCTIONS



ORIGINAL INSTRUCTIONS

GC11/23

INTRODUCTION

Thank you for purchasing this CLARKE heater. Before attempting to use this product, please read this manual thoroughly and follow the instructions carefully. In doing so you will ensure the safety of yourself and that of others around you and you can look forward to your purchase giving you long and satisfactory service.

This portable gas radiant heater is designed to give safe, efficient and reliable operation and is for use with **Propane Gas only**. Propane gas bottles are readily available from builders merchants or gas suppliers.

This heater is intended for drying and the warming of buildings where adequate ventilation is provided.

- **It must always be operated as prescribed in this manual.**
- **It is not intended for domestic use or for the heating of habitable areas.**
- **It is not intended to be used to reach and maintain a certain level of human thermal comfort within an enclosed space.**
- **It is not intended to be used in enclosed areas with restricted ventilation.**
- **It is not for use in areas with high levels of fluctuating drafts.**
- **It is not intended for warming animals or live stock.**
- **We recommend the use of a carbon monoxide detector.**

Proper combustion depends upon correct air flow and the heater must not be modified or operated with parts removed or missing. Likewise, safety systems must not be circumvented or modified in order to operate the heater.

SPECIFICATIONS

Gas Type	LPG (Propane) - G31
Suitable bottle sizes	5-13kg (max dia 300mm)
Output	4.2 kW (14,330 BTU/Hr)
Inlet pressure	37 mbar
Regulator flow rate	1.5 kg/hr
Fuel Consumption	0.3 kg/hr
Gas Hose Length	600 mm
Weight unpacked	2.1 kg inc hose & regulator
Dimensions (L x W x H)	320 x 220 x 350 mm
Safe working clearance	1.5m front, top & sides

GENERAL SAFETY PRECAUTIONS

Read and ensure you fully understand the following precautions and the hazards associated with this type of equipment.

1. Check the heater thoroughly for damage. **NEVER** operate a damaged heater.
2. **DO NOT** modify the heater or operate a heater which has been modified.
3. Use only propane gas (LPG).
4. Use only a VAPOUR WITHDRAWAL propane supply. If there is any question about vapour with-drawal, ask your propane dealer.
5. Position the propane cylinder vertically (shut-off valve up). Secure it from falling or being knocked over and protect from damage.
6. **IMPORTANT:** Use only the hose and regulator assembly provided with the heater. Inspect the hose assembly before each use of the heater. If there is excessive abrasion or wear, or hose is cut, replace with the hose assembly listed on the parts list before using the heater.
7. This heater is not to be used for the heating of habitable areas of domestic premises. Refer to national regulations.
8. Position the heater such that it is not directly exposed to water spray, rain and/or dripping water
9. This heater is for use only in well ventilated areas.
10. If at any time, gas odour is detected, **IMMEDIATELY STOP** operation until the source of the gas has been located & rectified
11. Maintain adequate clearance from normal combustible material
12. **DO NOT** place the heater near combustible materials such as curtains, furniture etc. Allow at least 1.5 metre clearance.
13. Due to the high surface temperatures, users must observe sufficient clearance to avoid burns or clothing ignition.
14. Use only on a firm, level surface.
15. **DO NOT** use with ductwork. **DO NOT** restrict air circulation.
16. **DO NOT** move, handle or clean while hot or burning.
17. Use only in accordance with local codes of practice.
18. **DO NOT** apply any torsional stress to the hose.
19. **DO NOT** leave the heater un-attended, for example, left on at night.

20. This heater is designed to heat larger areas such as workshops. **DO NOT** use the heater for any other function. It is not suitable for drying clothes or laundry.

21. Young children must be kept away unless continuously supervised.

FRESH AIR REQUIREMENTS

- DO NOT use in unventilated areas.
- The flow of combustion and ventilation air must not be obstructed.



WARNING: IF FRESH OUTSIDE AIR VENTILATION IS NOT PROVIDED, CARBON MONOXIDE POISONING CAN OCCUR.

RISKS OF CARBON MONOXIDE POISONING

Even though this heater operates very close to 100 percent combustion efficiency, it still produces small amounts of carbon monoxide.

- Carbon Monoxide (CO) is toxic.
- Pregnant women, persons with a heart or lung condition, anaemia or under the influence of alcohol, or those at high altitude, are more likely to be effected by Carbon Monoxide.
- CO can build up in a confined space and failure to provide adequate ventilation can be fatal.

The early symptoms of carbon monoxide poisoning are:

- headaches
- dizziness
- nausea
- dry mouth or sore throat
- blurred vision
- shortness of breath
- confusion
- loss of consciousness

Should anyone show these symptoms they must GET FRESH AIR IMMEDIATELY. Turn off the heater and have it serviced before using it again.

Be sure to follow all warnings in this manual.

WE RECOMMEND THE USE OF A CARBON MONOXIDE DETECTOR

IF YOU SMELL GAS

Liquid Propane gas has a man-made odourant added specifically for detection of gas leaks.

If a leak occurs you should be able to smell the gas. Since Propane (LP) is heavier than air you should smell for the gas odour near to the floor. ANY GAS ODOUR requires immediate attention.

1. DO NOTHING that could ignite the gas. DO NOT operate any electrical switches. DO NOT unplug any power supply or extension cables. DO NOT light matches or use any other source of ignition.
2. Get everyone out of the building and away from the area immediately.
3. Close all propane (LP) gas bottle fuel supply valves.
4. Propane (LP) gas is heavier than air and may settle in low areas. When you have reason to suspect a propane leak, keep out of all low areas.
5. Call the fire brigade. DO NOT re-enter the building or area.
6. Stay out of the building until declared safe by the firefighters.
7. FINALLY let the firefighters check for escaped gas. Have them ventilate the building before you return. Properly trained service people must repair any leaks, check for further leakages and then re-light the heater for you.
- 8. IF YOU SMELL EVEN A SMALL AMOUNT OF GAS, CONTACT THE FIRE BRIGADE. DO NOT WAIT!**

NO ODOUR DETECTED

1. Some people cannot smell the odour added to propane (LP). You must determine if you can smell the odourant in this fuel.
2. Learn to recognize the odour of propane (LP) gas. Local propane (LP) gas dealers will give you a "scratch and sniff" pamphlet. Use it to become familiar with the fuel gas odour.
3. Smoking can decrease your ability to smell. Being around an odour for a period of time can affect your sensitivity to that particular odour. Odours present in animal confinement buildings can mask fuel gas odour.

ODOUR FADING

1. The odourant in propane (LP) gas is colourless and the intensity of its odour can fade under some circumstances.
2. Propane (LP) gas odour may differ in intensity at different levels. Since LPG is heavier than air, there may be more odour at lower levels.
3. ALWAYS be sensitive to the slightest gas odour. If you continue to detect any gas odour, no matter how small, treat it as a serious leak.

CRITICAL POINTS TO REMEMBER!

1. Propane (LPG) gas has a distinctive odour. Learn to recognize the odour.
2. A periodic sniff test around the joints; i.e. hose, connections. etc, is a good safety practice under any conditions.

FEATURES OF THE GSH15 HEATER

Understanding the basic operation of the heater will reinforce the need to maintain it in top condition at all times whilst always observing the safety precautions.

The heater comprises of three basic systems:

1. The gas system.
2. The ignition system.
3. The safety control system.

GAS SYSTEM

The gas supply to the heater is by means of a high pressure hose, connected to a LPG cylinder via a pressure regulator. When the gas shut off valve is opened, gas will flow to the control valve and finally into the burner.

This heater is designed for use with PROPANE GAS ONLY. Gas bottles are readily available from builders merchants or gas suppliers etc.

This heater is designed to operate with a 5-13 kg propane bottle. Note that less gas is vaporised at lower temperatures. Your local propane gas dealer will help you select the proper gas supplies.


IGNITION SYSTEM

A Piezo-electric igniter is positioned at the burner head. When the igniter button is depressed a high intensity spark is generated which ignites the gas. Heat from the flame is sensed by a thermocouple connected to the control valve. As the thermocouple heats up, the control valve opens so that after a short period, the control valve button (see Operation page 11) may be released and the gas flame is established.

SAFETY CONTROL SYSTEM

Should the flame extinguish for any reason the thermocouple will quickly cool, causing the control valve to close, shutting off the gas supply.

COMPONENT PARTS

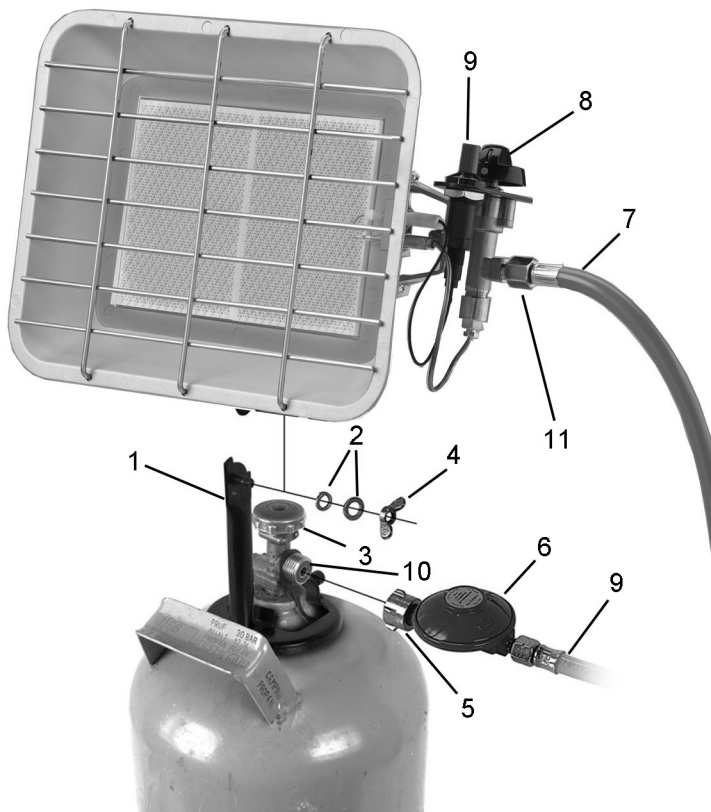

1	Mounting bracket
2	Washer and spring washer
3	Cylinder valve
4	Wingnut
5	Regulator connector
6	Constant pressure regulator

7	Connecting hose
8	Gas tap
9	Piezo ignition button
10	Cylinder connector
11	Appliance connector

ASSEMBLY

UNPACKING

Remove the heater from the carton and remove all protective material used for shipment. Check the heater for possible shipping damage. Should any damage be apparent, please notify your CLARKE dealer immediately.

ASSEMBLING THE SUPPORT STAND

1. Fit the mounting bracket onto the collar of the gas cylinder and tighten the mounting screw so that so that it engages with the collar of the gas cylinder.
2. Attach the heater to the mounting bracket using the bolt, washers and wingnut supplied.



LOCATING THE HEATER

The heater and gas cylinder must be located on a hard, level surface to minimize the risk of accidental tipping. The gas cylinder should be adequately restrained if needed. Only operate this heater with the cylinder in the upright position.

This heater must only be used in locations where the potential for damage to the heater or personal injury (burns), is reduced to a minimum.

It must be located where it will not be exposed directly to rain and/or dripping water.

Use of this heater in a drafty area reduces its efficiency. Wherever possible, operate in a draft free area.

Position the heater at a safe distance of 1.5 metre from combustible materials.

The heater must not be used on floors covered in combustible materials.

GAS CONNECTION



WARNING: GAS CYLINDERS MUST BE USED AND STORED IN ACCORDANCE WITH THE 'HIGHLY FLAMMABLE LIQUIDS AND LIQUEFIED PETROLEUM GASES REGULATIONS 1972.

WARNING: IF YOU DO NOT FOLLOW THESE INSTRUCTIONS EXACTLY, A FIRE OR EXPLOSION MAY RESULT CAUSING PROPERTY DAMAGE, PERSONAL INJURY OR LOSS OF LIFE.


The hose for connecting the heater to the gas bottle is supplied loose and must be fitted by the user.

Make the connection to the gas cylinder in a well ventilated area using the regulator and hose assembly supplied. The gas hose and cylinder must ALWAYS be positioned behind the heater.


1. Attach the regulator to the gas cylinder ensuring the cylinder connection is perfectly clean. Blow out with compressed air if necessary to blast away any dust or dirt. (Use eye protection when working with compressed air).
2. Remove the protective plug by unscrewing clockwise.




3. Check the bullnose connection on the regulator for any visible damage before connecting to the cylinder.

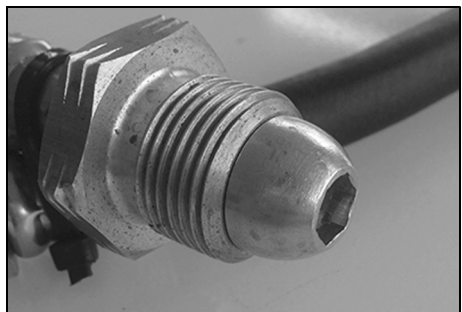

4. Place the regulator on the cylinder connection and hand tighten by turning anti-clockwise.

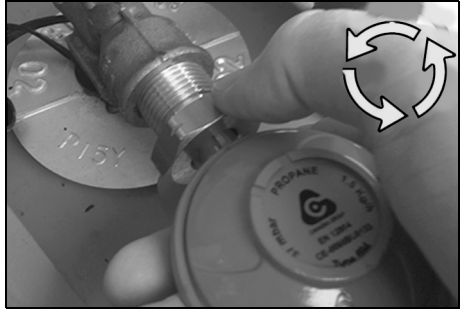

5. Tighten firmly using a gas spanner (or an adjustable spanner), continuing in an anti-clockwise direction.

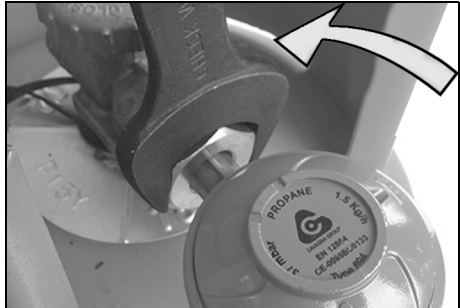

6. Simply turn the valve hand wheel on the cylinder anti-clockwise when you need to start the flow of gas. Ensure that you turn the cylinder off when not in use.
7. In order to reduce the risk of icing up when operating for long periods at maximum capacity, you should use a larger capacity gas bottle.
8. Open the cylinder gas valve and check all gas connections with a soap and water solution. To check for leaks using soapy water or liquid soap ONLY. NEVER USE A FLAME.
9. Use a full cylinder wherever possible with good air circulation and no frost on the cylinders.

OPERATION



WARNING: BEFORE STARTING THE HEATER YOU MUST ENSURE THAT THE MINIMUM VENTILATION REQUIREMENTS ARE OBSERVED TO AVOID THE RISK OF CARBON MONOXIDE POISONING.

WARNING: THIS HEATER WILL BE HOT DURING NORMAL OPERATION. AVOID PHYSICAL CONTACT. DO NOT ALLOW CLOTHING OR OTHER COMBUSTIBLE MATERIALS TO TOUCH THE HEATER.

FIRST USE

Read these instructions carefully. DO NOT allow anyone who has not read the instructions to light, adjust, or operate this heater.

DO NOT attempt to operate the heater with any fuel other than LPG (liquid propane gas).

The heater reaches a very high temperature and during first use you may notice an odour coming from the heater. This is quite normal and will disperse quickly.

When initially used outdoors the odour will quickly clear.

Set the heater at the required angle to project the heat forward.

LIGHTING THE HEATER



WARNING: DO NOT FACE THE HEATER ELEMENT WHEN STARTING - ALWAYS STAND TO ONE SIDE.

1. Ensure that the gas is correctly connected and leak free. Turn on the gas supply at the bottle and at the shut off valve (marked ON/OFF on the knob).
2. Press and hold the control valve plunger whilst repeatedly pressing the piezo-electric button until the burner ignites.
 - Once the burner ignites, keep the control valve plunger depressed for 12-15 seconds or until the burner stays lit after it is released.

NOTE: If a new gas cylinder has been connected, it may take time for the gas line to be purged of air. Press the Piezo electric button every 10-15 seconds until it ignites.

3. Alternatively, hold a lit taper to the burner face while pressing and holding the control valve button. After the burner ignites, keep the button pressed for 12-15 seconds or until the burner stays lit after releasing the button.

NOTE: Open the shut off valve and listen for the gas passing through the heater for a few moments before operating the igniter and attempting to light the heater. New installations generally require this.

NOTE: When lighting the burner with a taper, light at the bottom of the screen, not at the nozzle.

SHUTTING OFF THE HEATER

1. Close the propane gas supply cylinder valve.
2. Observe the burner until the flame is extinguished.
3. Close the shut off valve on the heater.
4. DO NOT re-open the propane gas supply cylinder valve before the shut-off valve is closed.

TROUBLESHOOTING

Fault	Cause	Remedy
Burner fails to light	<ol style="list-style-type: none"> 1. Gas supply valve closed. 2. Excess gas flow 3. Piezo ignition not sparking. 4. Defective thermocouple 	<ol style="list-style-type: none"> 1. Open gas supply valve slowly 2. Close propane supply valve at propane tank and re-open slowly. 3. Check wire lead for damage. Replace igniter assembly. Do not bend the electrode as this may cause breakage. 4. Replace thermocouple..
No gas flow to the burner.	<ol style="list-style-type: none"> 1. Cylinder gas valve closed. 2. Cylinder is empty. 3. Nozzle is obstructed. 4. Gas leaks from the supply hose or from tap. 5. Low gas pressure. 6. Control valve needs to be replaced. 7. Loose or broken wire. 8. Defective thermocouple 	<ol style="list-style-type: none"> 1. Open the gas valve 2. Replace cylinder. 3. Remove & clean the nozzle. 4. Use soapy water to find the leak and repair. 5. Check for proper gas supply. 6. Replace control valve. 7. Tighten or repair wire. 8. Replace thermocouple.
Heater stops during operation.	<ol style="list-style-type: none"> 1. Excessive or insufficient gas supply. 	<ol style="list-style-type: none"> 1. Check the pressure regulator and replace if necessary.

CLEANING & MAINTENANCE



WARNING: NEVER ATTEMPT ANY MAINTENANCE WHILE THE HEATER IS CONNECTED TO THE PROPANE SUPPLY, IS ON USE OR IS HOT. (SEVERE BURNS CAN RESULT).

As with any equipment, optimum performance will only be achieved if the correct application and servicing procedures are followed.

1. Turn the heater off and let it cool for at least 15 minutes before cleaning.
 2. Inspect the heater before each use. Check the connections for leaks. Apply a mixture of liquid soap and water to the connections. Bubbles forming indicate a leak. Correct any leaks at once.
 3. Keep the heater clean. Clean the heater annually or as needed to remove dust and debris. If the heater is dirty or dusty, clean with a damp cloth. Use household cleaners on difficult spots.
 4. Clean the inside of the heater using compressed air where possible. Blow air across the burner face until all dust has been dislodged from the surface. Use eye protection if using compressed air.
 5. If the hose shows evidence of excessive abrasion or wear or if the hose is cut it must be replaced prior to the heater being put into operation. The replacement hose assembly shall be as supplied by CLARKE International.
 6. The heater, including hose and regulator assembly, should be inspected at least annually by a qualified service person.
-

GUARANTEE

This product is guaranteed against faulty manufacture for a period of 12 months from the date of purchase. Please keep your receipt which will be required as proof of purchase.

This guarantee is invalid if the product is found to have been abused or tampered with in any way, or not used for the purpose for which it was intended.

Faulty goods should be returned to their place of purchase, no product can be returned to us without prior permission. This guarantee does not effect your statutory rights.

DECLARATIONS OF CONFORMITY



Hemmill Street, Epping, Essex, CM16 4LG

DECLARATION OF CONFORMITY

This is an important document and should be retained.

We hereby declare that this product(s) complies with the following legislation:

- The Electromagnetic Compatibility Regulations 2016*
- The Gas Appliances (Enforcement) and Miscellaneous Amendments Regulations 2016*
- The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012*

The following standards have been applied to the product(s):

EN IEC 61000-6-1:2019, EN IEC 61000-6-3:2021, EN 461-1999-A1:2004

The technical documentation required to demonstrate that the product(s) meet(s) the requirement(s) of the aforementioned legislation has been compiled and is available for inspection by the relevant enforcement authorities.

The UKCA mark was first applied in: 2023

Product Description: Space Heater
 Model Number(s): GSH15
 Serial/Batch Number: Refer to product/packaging label
 Date of Issue: 08/11/2023

Signed:

J.A. Clarke
 Director



Fitzwilliam Hall, Fitzwilliam Place, Dublin 2

DECLARATION OF CONFORMITY

This is an important document and should be retained.

We hereby declare that this product(s) complies with the following legislation:

- 2014/30/EU *Electromagnetic Compatibility Directive*
- 2016/426 *Gas Appliance Regulation*
- 2011/65/EU *Restriction of Hazardous Substances (RoHS) Directive*

The following standards have been applied to the product(s):

EN IEC 61000-6-1:2019, EN IEC 61000-6-3:2021, EN 461-1999-A1:2004

The technical documentation required to demonstrate that the product(s) meet(s) the requirement(s) of the aforementioned legislation has been compiled and is available for inspection by the relevant enforcement authorities.

The CE mark was first applied in: 2023

Product Description: Space Heater
 Model Number(s): GSH15
 Serial/Batch Number: Refer to product/packaging label
 Date of Issue: 08/11/2023

Signed:

J.A. Clarke
 Director

A SELECTION FROM THE VAST RANGE OF

Clarke®

QUALITY PRODUCTS



AIR COMPRESSORS

From DIY to industrial, Plus air tools, spray guns and accessories.

GENERATORS

Prime duty or emergency standby for business, home and leisure.

POWER WASHERS

Hot and cold, electric and engine driven - we have what you need

WELDERS

Mig, Arc, Tig and Spot. From DIY to auto/industrial.

METALWORKING

Drills, grinders and saws for DIY and professional use.

WOODWORKING

Saws, sanders, lathes, mortisers and dust extraction.

HYDRAULICS

Cranes, body repair kits, transmission jacks for all types of workshop use.

WATER PUMPS

Submersible, electric and engine driven for DIY, agriculture and industry.

POWER TOOLS

Angle grinders, cordless drill sets, saws and sanders.

STARTERS/CHARGERS

All sizes for car and commercial use.

PARTS & SERVICE:

0208 988 7400

Parts Enquiries

Parts@clarkeinternational.com

Servicing & Technical Enquiries

Service@clarkeinternational.com

SALES: UK 01992 565333 or Export 00 44 (0)1992 565335

Clarke INTERNATIONAL Hemnall Street, Epping, Essex CM16 4LG
www.clarkeinternational.com