

CLARKE[®]

air



3/8" ANGLED AIR DRILL

MODEL NO: CAT61

PART NO: 3110461

OPERATING & MAINTENANCE INSTRUCTIONS

UK
CA | CE

DL1222 R2





INTRODUCTION

Thank you for purchasing this CLARKE Angled Air Drill.

Before attempting to use this product, please read this manual thoroughly and follow the instructions carefully. In doing so you will ensure the safety of yourself and that of others around you, and you can look forward to your purchase giving you long and satisfactory service.

IMPORTANT

Please read all of the safety and operating instructions carefully before using this product. The following safety symbols are to be found on the machine.

	Read this instruction booklet carefully before use.		Wear ear protection.
	Wear eye protection.		Wear dust mask.

GUARANTEE

This product is guaranteed against faulty manufacture for a period of 12 months from the date of purchase. Please keep your receipt which will be required as proof of purchase.

This guarantee is invalid if the product is found to have been abused or tampered with in any way, or not used for the purpose for which it was intended.

Faulty goods should be returned to their place of purchase, no product can be returned to us without prior permission.

This guarantee does not effect your statutory rights.

GENERAL SAFETY RULES



CAUTION: FAILURE TO FOLLOW THESE PRECAUTIONS COULD RESULT IN PERSONAL INJURY, AND/OR DAMAGE TO PROPERTY.

WORK ENVIRONMENT

1. Keep the work area clean and tidy.
2. Dress appropriately - Do not wear loose clothing or jewellery. Tie long hair out of the way.
3. Keep children and visitors away - Do not let children handle the tool.
4. Do not operate the tool where there are flammable liquids or gases.

USE OF POWER TOOLS

1. Stay alert and use common sense - do not operate the drill when you are tired or under the influence of alcohol, drugs or medication.
2. Always wear eye protectors when using the drill - Eye protectors must provide protection from flying particles from the front and the side.
3. Always wear ear protectors when using the drill.
4. Do not overreach - Keep proper footing and balance at all times.
5. Never use any type of bottled gas as a source of power for the drill.
6. Do not connect the air supply hose with your finger on the trigger of the drill.
7. Do not exceed the maximum pressure for the drill 90 psi / 6.2 bar.
8. Check hoses for leaks or worn condition before use, and ensure that all connections are secure.
9. Keep the air supply hose away from heat, oil and sharp edges.
10. Do not use the tool for any other purpose than that described in this manual.
11. Do not fit the tool to any stand or clamping device that may damage it.
12. Do not carry out any alterations or modifications to the tool.
13. Always disconnect from the air supply when:
 - Performing any maintenance
 - The drill is not in use.

- The drill will be left unattended.
- Moving to another work area.
- Passing the drill to another person.

14. Never use the tool if it is defective or operating abnormally.

15. The drill should be serviced at regular intervals by qualified service personnel.

16. Avoid damaging the drill for example by applying excessive force of any kind.

17. ALWAYS maintain the tool with care. Keep it clean for the best and safest performance.

18. Quick change couplings should not be located at the tool. They add weight and could fail due to vibration.

19. Do not force or misuse the tool. It will do a better and safer job at the rate for which it was designed.

20. Do not remove any labels. Damaged labels should be replaced.

21. This tool vibrates with use. Vibration may be harmful to your hands or arms. Stop using the tool if discomfort, a tingling feeling or pain occurs. Seek medical advice before resuming use.


TRANSPORTATION

1. Never carry the drill by the air supply hose.
2. Never carry the drill with your finger on the trigger.

STORAGE

1. When not in use the drill must be disconnected from the air supply and stored in a dry place out of the reach of children (preferably in a locked cabinet).
2. Avoid storing the drill in environments where the temperature is below 0°C.

OVERVIEW

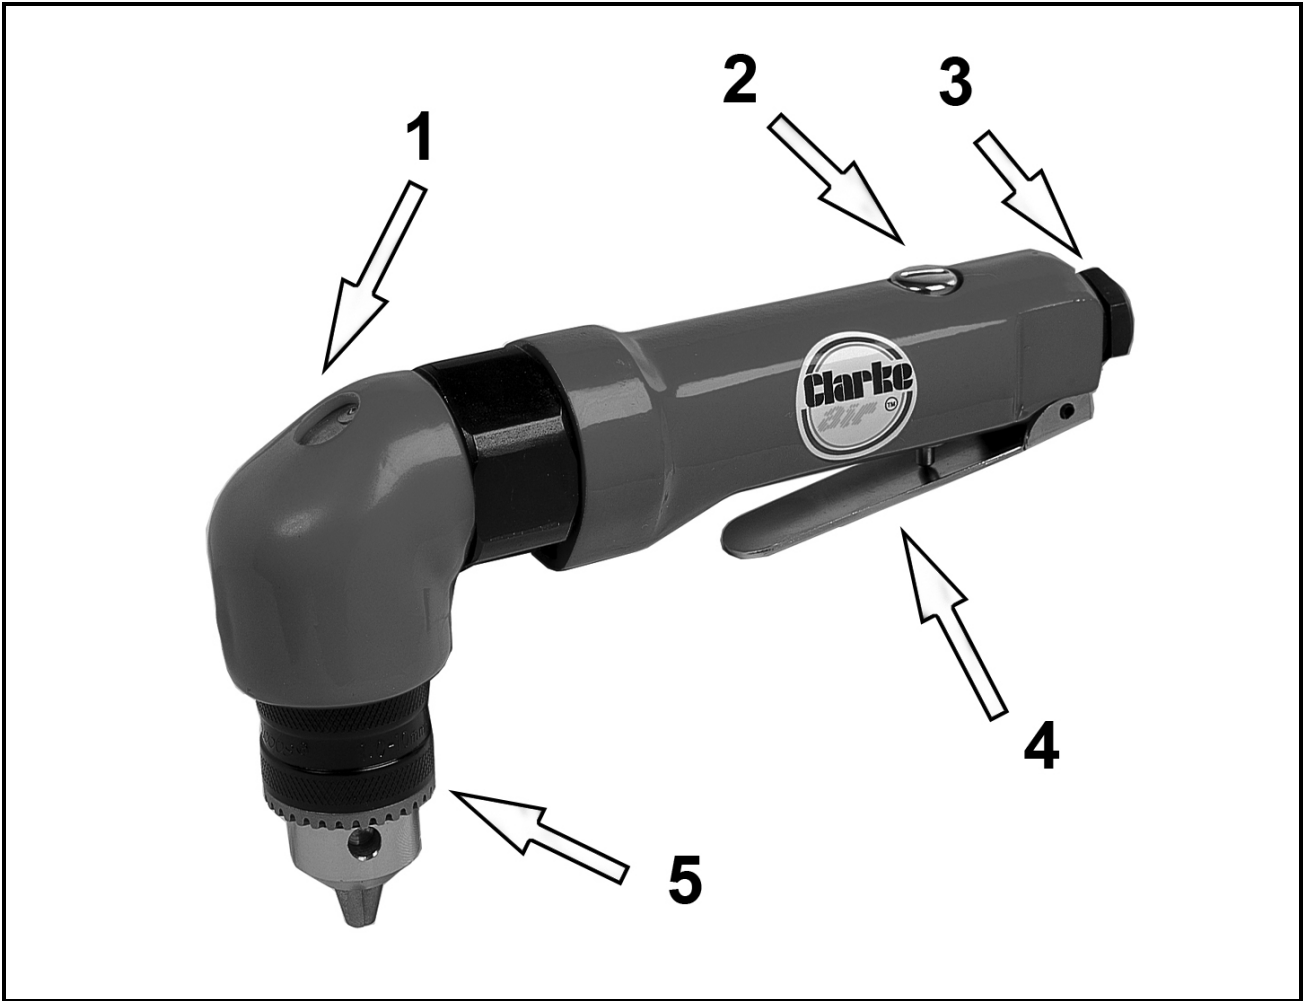

NO	DESCRIPTION	NO	DESCRIPTION
1	Lubrication Point	4	Trigger
2	Regulator Valve	5	Chuck
3	1/4" BSP female air inlet		


THE COMPRESSED AIR SUPPLY

AIR SUPPLY REQUIREMENTS



WARNING: COMPRESSED AIR CAN BE DANGEROUS. ENSURE THAT YOU ARE FAMILIAR WITH ALL PRECAUTIONS RELATING TO THE USE OF COMPRESSORS AND COMPRESSED AIR SUPPLY.

- Use only clean, dry, regulated compressed air as a power source.
- Air compressors used with the impact wrench must comply with the appropriate European Community Safety Directives.
- A build-up of moisture or oil in the air compressor will accelerate wear and corrosion in the impact wrench. ensure any moisture is drained from the compressor daily and the inlet filter is kept clean.
- If an unusually long air hose is required, (over 8 metres), the line pressure or the hose inside diameter may need to be increased.
- The air hose must be rated at least 150% of the maximum operating pressure of the tool.

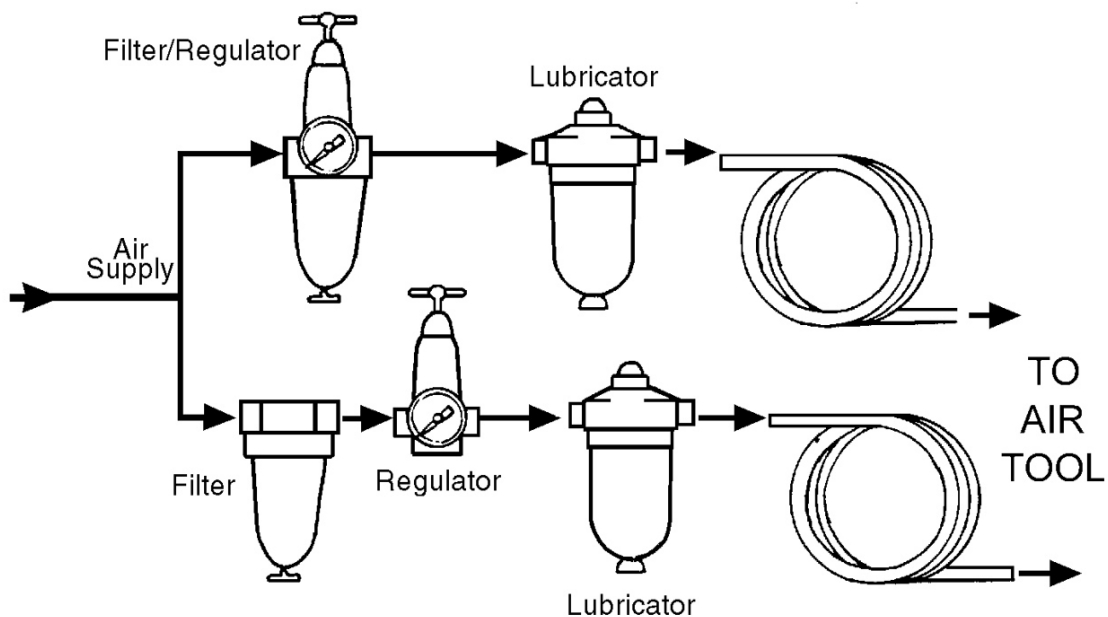

- A typical air line layout is shown above. If an automatic in-line filter/regulator is used, it will keep the tool in good condition, but should be regularly checked and topped up with oil. SAE 10 oil should be used, and the lubricator adjusted to approx 2 drops per minute.
- The minimum hose diameter should be 5/16" (8mm) ID and fittings should have the same internal dimensions.

- Never exceed the maximum operating pressure for the tool. It is recommended that air pressure to this tool does not exceed 90 psi at the tool when running. Higher pressures and unclean air will shorten the life of the tool due to faster wear and is a possible safety hazard.


BEFORE USE



WARNING: COMPRESSED AIR CAN BE DANGEROUS. ENSURE THAT YOU ARE FAMILIAR WITH ALL PRECAUTIONS RELATING TO THE USE OF AIR COMPRESSORS AND COMPRESSED AIR SUPPLY.

NOTE: Ensure the air supply is turned off.

1. If required, connect an in-line mini oiler to the tool.
 - A mini oiler helps to prolong the life of the air tool. Remove the oil fill screw from the side of the mini oiler and fill with Air-line Oil available from your CLARKE dealer. Replace the screw before using the tool.
2. If a mini-oiler is not being used, run a few drops of oil through the tool before use. It can be entered through the air inlet.
3. Connect a suitable hose to the female air inlet as shown.
4. Connect the other end of the hose to the air supply.
5. Turn on the air supply and check for air leaks.
 - Rectify any found before proceeding.

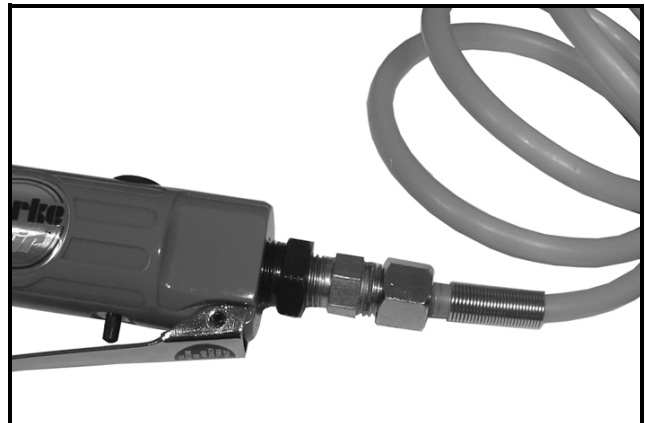


Your air tool is now ready for use.

You can fit a whip hose with a quick fit coupling if required (available from your Clarke dealer.)

INSERTING/REMOVING THE DRILL BIT

1. Open the chuck jaws by inserting the chuck key in one of the holes in the chuck and turning it as shown.
2. Make sure that the head of the chuck key is located on the barrel of the chuck.
3. Turn the chuck key until the chuck jaws are open sufficiently to take the drill bit.
4. Place the drill bit in the jaws of the chuck as far as it will go.
5. Close the chuck jaws and tighten to grip the drill bit by turning the chuck key as shown.
6. Make sure that the chuck jaws are fully closed and that the drill bit is held firmly.
7. Your air drill is now ready for use.

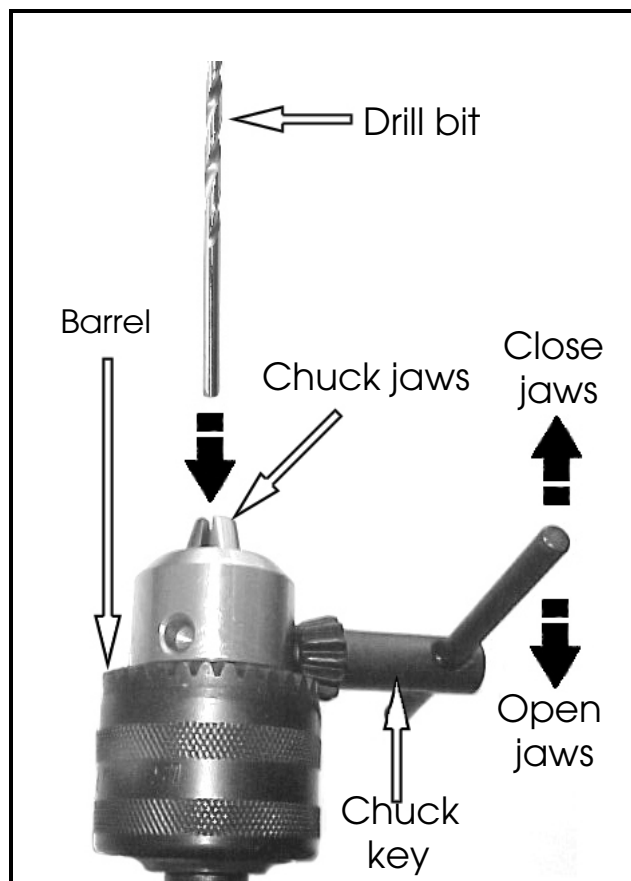

OPERATION

OPERATING THE AIR DRILL

1. Squeeze the trigger to start the drill.
2. Release the trigger to stop the drill.
3. Always ensure the drill has stopped before putting it down.

DISCONNECTING THE AIR SUPPLY

Do not disconnect the air supply hose until the air supply has been shut down and the compressed air released.

1. Refer to the compressor instruction manual for the procedure to shut down and release the compressed air.
2. Once the pressure has been released, disconnect the air supply hose from the air drill.

Store the tool safely in its box in a dry, secure environment.

MAINTENANCE




WARNING: MAKE SURE THAT THE DRILL IS DISCONNECTED FROM THE AIR SUPPLY BEFORE STARTING ANY CLEANING, OR MAINTENANCE PROCEDURES.

DAILY

1. Before use, drain water from the compressed air supply.
2. Pour a few drops of CLARKE airline oil, into the air inlet. This should be carried out regardless of whether or not an in-line mini oiler is used. If an inline mini oiler is not used, this procedure should be repeated after every two to three hours of use.

WEEKLY

1. Check the air inlet screen filter for blockage and clean if necessary.
1. Keep the body of the tool clean and free from debris. Grit or gum deposits in the tool may reduce efficiency.

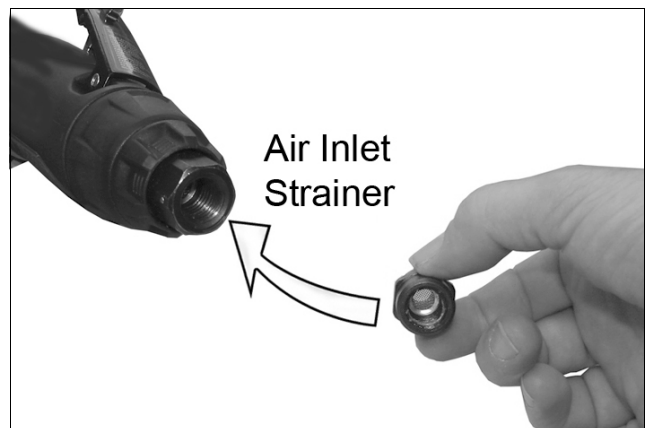

LUBRICATION

The right angle drive is fitted with a grease nipple to provide a facility for lubrication of the drive gears.

2. After extensive use, apply a shot of general purpose grease using a suitable grease gun.



SERVICE AND REPAIR

If the tool runs erratically or becomes inefficient although the air supply is in good order, it may be necessary to dismantle the tool. Such servicing and repair work should be carried out by qualified service technicians.

PERFORMANCE

Please note that factors other than the tool may effect its operation and efficiency such as reduced compressor output, excessive drain on the airline moisture or restrictions in the air-line, or the use of connectors of improper size or poor condition which will reduce air supply.

Grit or gum deposits inside the tool may also reduce its efficiency. This condition can be corrected by cleaning out the air strainer and flushing out the tool with gum solvent or oil, or failing this, the motor may require dismantling.

**Clarke Air Line Oil (part no. 3050825) is available from your CLARKE dealer.

STORAGE

If the tool is to be stored, or is idle for longer than 24 hours, run a few drops of Clarke air line oil into the air inlet, and run the tool for 5 seconds in order to lubricate the internal parts.

When not in use, disconnect from air supply, clean tool and store in a safe, dry place.

ACCESSORIES


A wide range of accessories is available including filter/regulators, lubricators, high-pressure hoses (5 to 50 metres) etc.

Contact your CLARKE dealer for further information or CLARKE International Service Department on 01992 565333.T

TROUBLESHOOTING

SYMPTOM	PROBLEM	SOLUTION
Tool runs at normal speed but slows down under any load.	<ol style="list-style-type: none"> 1. Excessive pressure on drill. 2. Motor parts worn. 3. Worn or sticking mechanism due to lack of lubricant. 	<ol style="list-style-type: none"> 1. Reduce the force applied to the drill. 2. Return to Clarke dealer for repair. 3. Drip air tool lubricating oil into air inlet. Allow oil to soak moving parts before using.
Tool runs slowly. Air flows weakly from exhaust.	<ol style="list-style-type: none"> 1. Motor parts jammed with gum/dirt. 2. Regulator in closed position. 3. General airflow blocked by dirt. 	<ol style="list-style-type: none"> 1. Examine inlet air filter for cleanliness. 2. Adjust regulator to open position. 3. Operate tool in short bursts.
Tool will not run. Air flows freely from exhaust.	<ol style="list-style-type: none"> 1. Motor vanes stuck due to buildup of foreign material. 	<ol style="list-style-type: none"> 1. Disconnect air supply and rotate tool assembly manually. 2. Try operating tool in short bursts. 3. Tap motor housing gently with a rubber mallet. 4. Drip a few drops of air tool lubricating oil into air inlet to soak moving parts.
Tool will not shut off.	<ol style="list-style-type: none"> 1. O-rings damaged or ill-fitting in seat. 	<ol style="list-style-type: none"> 1. Return to Clarke dealer for repair.

PARTS DIAGRAM

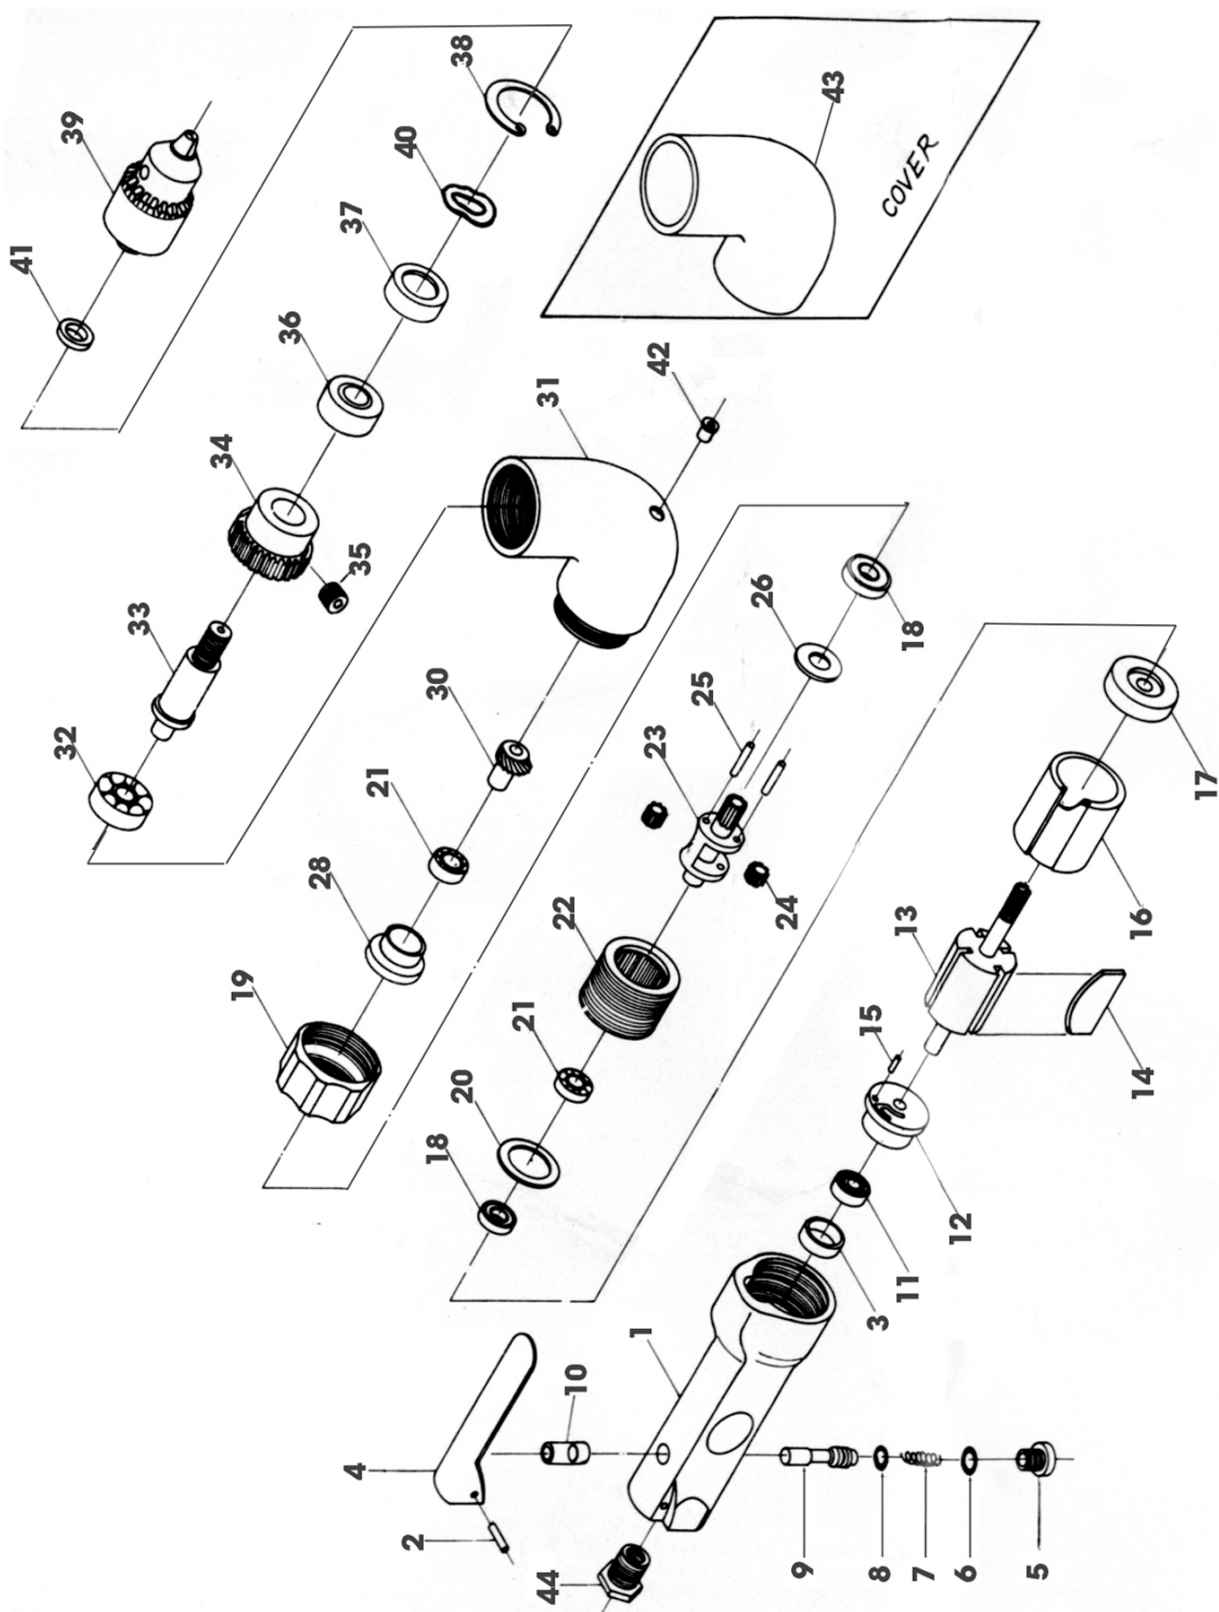

PARTS LIST

No	Description
1	Housing
2	Pin
3	Bearing Cap
4	Throttle Lever
5	Valve Screw
6	O-Ring
7	Spring
8	O-Ring
9	Throttle Valve
10	Valve Bushing
11	Ball Bearing
12	Rear End Plate
13	Rotor
14	Rotor Blade
15	Pin
16	Cylinder
17	Front End Plate
18	Ball Bearing
19	Clamp Nut
20	Washer
21	Ball Bearing
22	Ring Gear

No	Description
23	Planet Cage
24	Planet Gear
25	Pin
26	Washer
27	n/a
28	Bearing Cap
29	n/a
30	Pinion
31	Angle Housing
32	Ball Bearing
33	Spindle
34	Gear
35	Set Screw
36	Ball Bearing
37	Bearing Cap
38	Retaining Ring
39	3/8" Drill Chuck
40	Wave Washer
41	Spacer
42	Grease Cup
43	Cover
44	Air Inlet

SPECIFICATION

Model Numbers	CAT61
Part Number	3110461
Min. Hose Size (ID)	8 mm (5/16")
Chuck Size	1.5 - 10 mm (3/8")
Operating Pressure	90 psi (6.2 bar)
Air Consumption	4 cfm
No Load Speed	1900 rpm @ 90psi
Air Inlet Size	1/4" BSP Female
Sound Pressure Level (LpA dB)	86dB(A)
Sound Power Level (LwA dB)	98 dB(A)
Vibration Levels	1.38 m/s ²
Vibration Uncertainty K	1.5
Weight	1 kg

Please note that the details and specifications contained herein are correct at the time of going to print. However CLARKE International reserve the right to change specifications at any time without prior notice. Always consult the machine's data plate.

DECLARATION OF CONFORMITY

UK
CA

Clarke
INTERNATIONAL

Hemnell Street, Epping, Essex CM16 4LG

DECLARATION OF CONFORMITY

This is an important document and should be retained.

We hereby declare that this product(s) complies with the following statutory requirement(s):

Supply of Machinery (Safety) Regulations 2008

The following standards have been applied to the product(s):

EN ISO 15744:2002, EN ISO 28927-5:2009

The technical documentation required to demonstrate that the product(s) meet(s) the requirement(s) of the aforementioned legislation has been compiled and is available for inspection by the relevant enforcement authorities.

The UKCA mark was first applied in: 2022

Product Description: 3/8" Angle Air Drill
Model number(s): CAT61
Serial / batch Number: N/A
Date of Issue: 30/11/2022

Signed:



J.A. Clarke
Director

CE

Clarke
INTERNATIONAL

Fitzwilliam Hall, Fitzwilliam Place, Dublin 2

DECLARATION OF CONFORMITY

This is an important document and should be retained.

We hereby declare that this product(s) complies with the following directive(s):

2006/42/EC Machinery Directive

The following standards have been applied to the product(s): 2012

EN ISO 15744:2002, EN ISO 28927-5:2009

The technical documentation required to demonstrate that the product(s) meet(s) the requirement(s) of the aforementioned directive(s) has been compiled and is available for inspection by the relevant enforcement authorities.

The CE mark was first applied in: 2012

Product Description: 3/8" Angle Air Drill
Model number(s): CAT61
Serial / batch Number: N/A
Date of Issue: 30/11/2022

Signed:



J.A. Clarke
Director

A SELECTION FROM THE VAST RANGE OF

Clarke®

QUALITY PRODUCTS



AIR COMPRESSORS
From DIY to industrial, Plus air tools, spray guns and accessories.

GENERATORS
Prime duty or emergency standby for business, home and leisure.

POWER WASHERS
Hot and cold, electric and engine driven - we have what you need

WELDERS
Mig, Arc, Tig and Spot. From DIY to auto/industrial.

METALWORKING
Drills, grinders and saws for DIY and professional use.

WOODWORKING
Saws, sanders, lathes, mortisers and dust extraction.

HYDRAULICS
Cranes, body repair kits, transmission jacks for all types of workshop use.

WATER PUMPS
Submersible, electric and engine driven for DIY, agriculture and industry.

POWERTOOLS
Angle grinders, cordless drill sets, saws and sanders.

STARTERS/CHARGERS
All sizes for car and commercial use.



PARTS & SERVICE: 0208 988 7400

Parts Enquiries
Parts@clarkeinternational.com

Servicing & Technical Enquiries
Service@clarkeinternational.com

SALES: UK 01992 565333 or Export 00 44 (0)1992 565335

Clarke® INTERNATIONAL Hemnall Street, Epping, Essex CM16 4LG
www.clarkeinternational.com